


TOP VIEW

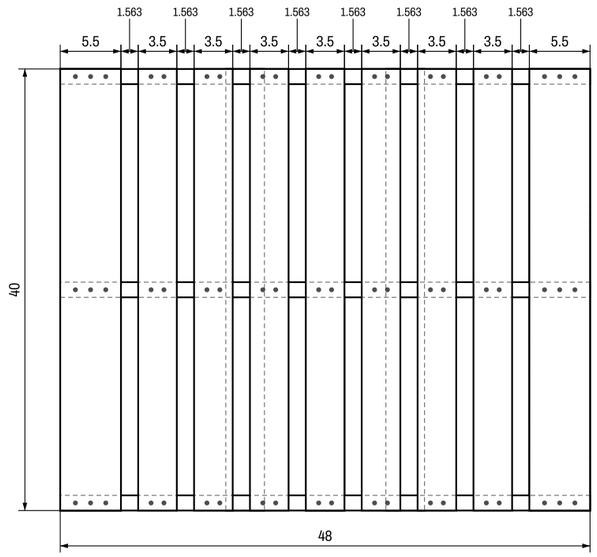



FRONT VIEW

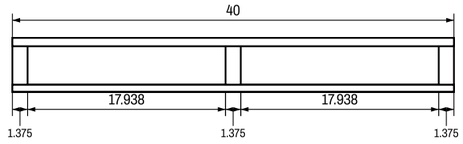

RIGHT SIDE VIEW

SPEC SHEET	
Size (L × W × H)	48 × 40 × 4.875 in
Type	Stringer
Entry	Partial 4-way (notched)
Pallet weight	≈ 70 lb
Design load	2,500 lb
Top deck	9 boards, 3/4 in thick
Stringers	3 × 1-3/8 × 3-1/2 in, notched
Bottom deck	5 boards, 5/8 in thick
Lumber	Mixed hardwood, heat treated (ISPM-15)
Fasteners	96 × 2-1/4 in helical

NOTES

1. All dimensions in inches, actual size.
2. Nails per Uniform Standard Table 5: two per joint on boards up to 5-1/4 in, three up to 7-1/4 in.
3. Interior bottom boards clustered between the notches.
4. Heat treat and stamp to ISPM-15.

Request for quotation

GMA 48×40 export · 48 × 40 in

RFQ NO.	DATE	REV
PD-20260924-GMA	2026-09-24	E

ITEM	QTY	DESCRIPTION	CUT SIZE, T × W × L (IN)	MATERIAL	BD FT
1	2	Top lead board	3/4 × 5-1/2 × 40	Mixed hardwood, standard grade, HT	2.29
2	7	Top interior board	3/4 × 3-1/2 × 40	Mixed hardwood, standard grade, HT	5.10
3	3	Stringer, notched	1-3/8 × 3-1/2 × 48	Mixed hardwood, standard grade, HT	4.81
4	2	Bottom lead board	5/8 × 5-1/2 × 40	Mixed hardwood, standard grade, HT	1.91
5	3	Bottom interior board	5/8 × 3-1/2 × 40	Mixed hardwood, standard grade, HT	1.82
	17	**Pieces per pallet · fasten with 96 × 2-1/4 in helical nails (Uniform Standard Table 5)**			**15.94**

QUANTITY
500 pallets

RELEASE
Monthly, ongoing

CONDITION
New

DELIVER TO
30303

ENTRY
Partial 4-way (notched stringers)

HEAT TREATMENT
ISPM-15, stamped

UNIT LOAD
2,500 lb, boxes

HANDLING
Stacked 2 high

SUPPLIER TO COMPLETE

Unit price _____

Lead time _____

Quote valid until _____

Freight _____

TITLE	DRAWN BY	SCALE	DWG NO.	SHEET
GMA 48×40 export	**palletdesign.ai**	NTS	SAMPLE-G	1 of 1